



Flex Access Point

A compact, powerful 5G Indoor AP supporting multiple bands. Easy installation with PoE++, wall or ceiling mount. Ideal for enterprises requiring robust private cellular coverage.



- Zero touch provisioning on Mobile Cloud.
- Maximizes available bandwidth.
- Extends Enterprise LAN for broader wireless coverage.
- Optimized for IT and IoT use cases.
- Simple and fast deployment with integrated small cell technology.
- High data rates to support modern edge applications.
- Data in-flight encryption.



Cloud-based operations requires less resources onpremise and rapid just-intime deployments.



Maximize available bandwidth with private spectrum or CBRS with Spectrum Allocation Service (SAS) support.



Configurations optimized for IoT use cases tuneable for coverage vs capacity with flexible throughput controls.



Enhance enterprise security with SIM, device, and user onboarding. Extend enterprise LAN segments into your private cellular network.








Flex Access Point

Antenna Pattern

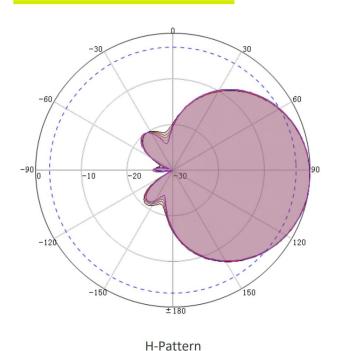

Key Features

- Supports CBRS Band B48
- Up to 40 MHz Channel
- · Wall or pole mount
- POE++ Support
- Integrated 13dBi Sector Antenna
- **GPS & PTP Synchronization**
- 4 x 23dBm Output Power
- LTE-TDD Mode

Technical Specifications

Synchronization:

GPS, PTP 1588 v2

Interfaces:

1 RJ-45 Ethernet (1 GE)

MIMO:

DL/UL: 2x2 per carrier

Antenna:

2 x Internal 13dBi 65-degree sector antenna

Dimensions:

12.6 x 8.9 x 4.1 in, 319 x 227 x 104 mm

Weight:

10.7 lbs / 4.85Kg

Power:

POE++

Operating Temperature:

-40°F to 131°F / -40°C to 55°C

Certifications:

OnGo® Alliance Certified, FCC and CE certified.